




# LG VX8700 Camera Replacement

This guide outlines the steps necessary to replace the camera in your LG VX8700. The camera allows the user to take pictures through the phone.

Written By: Andrew

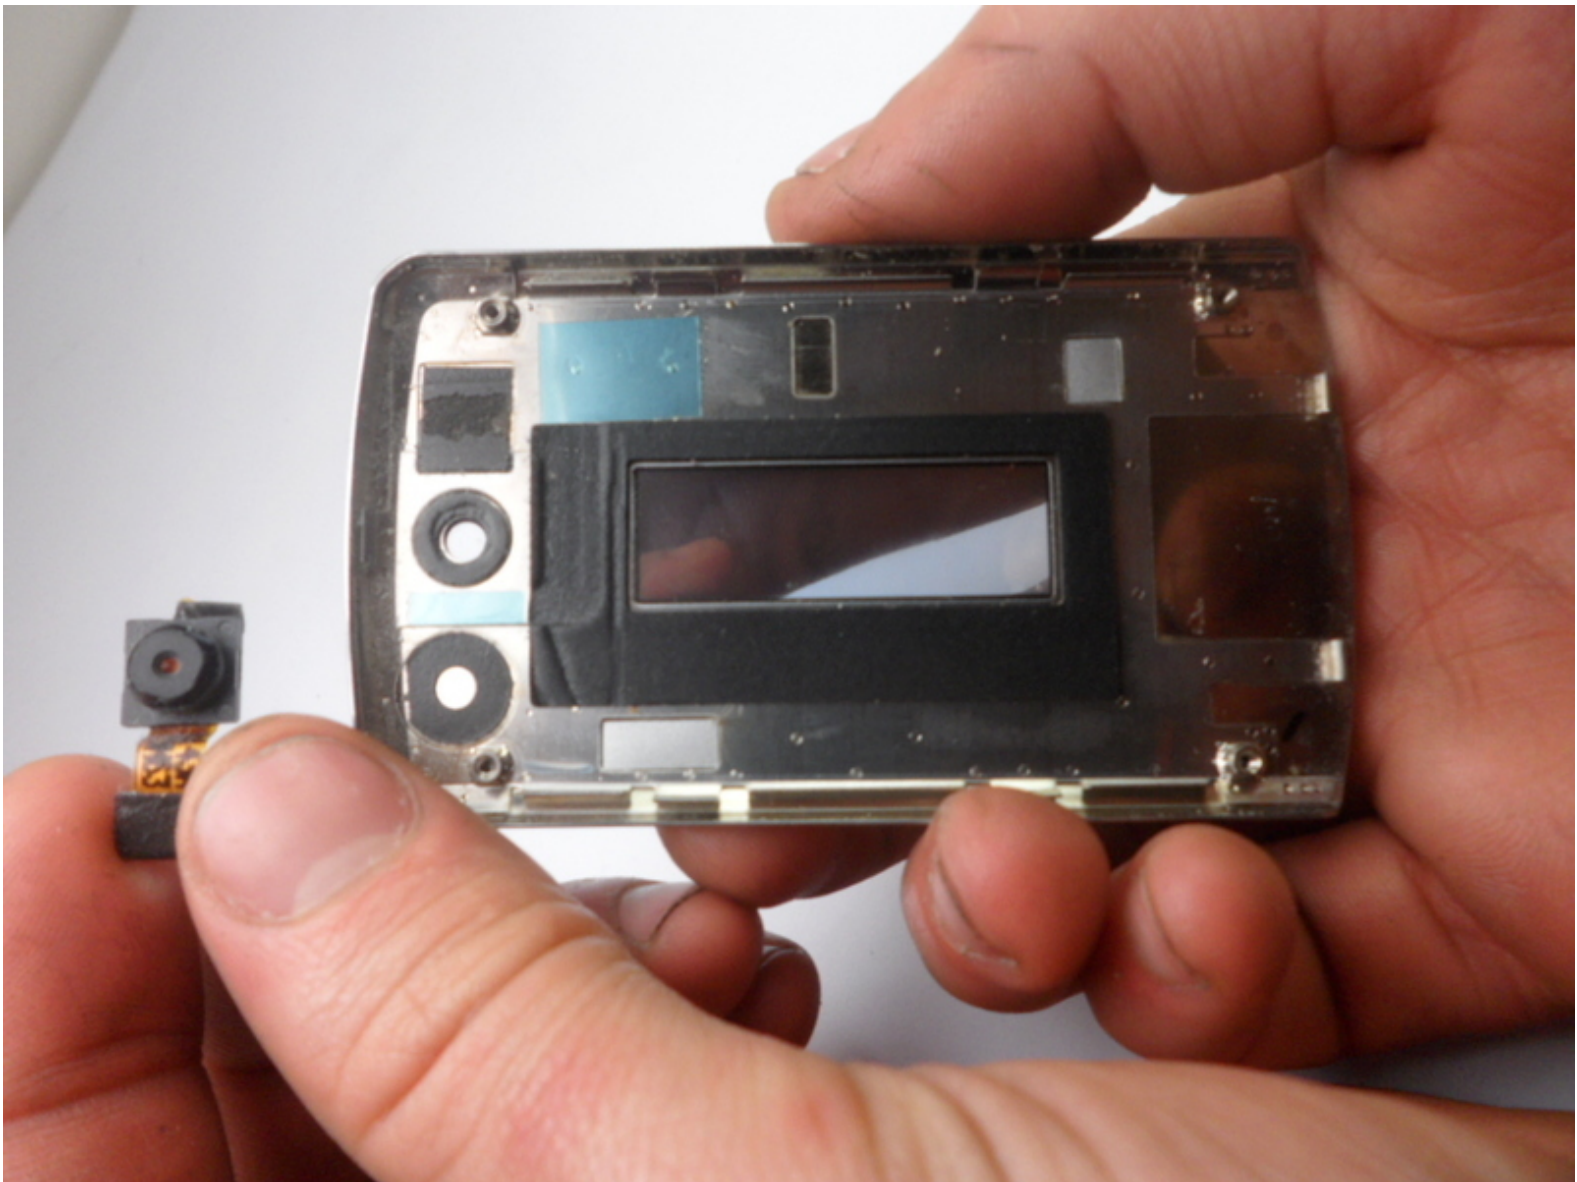




## TOOLS:

- [Phillips #0 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Battery

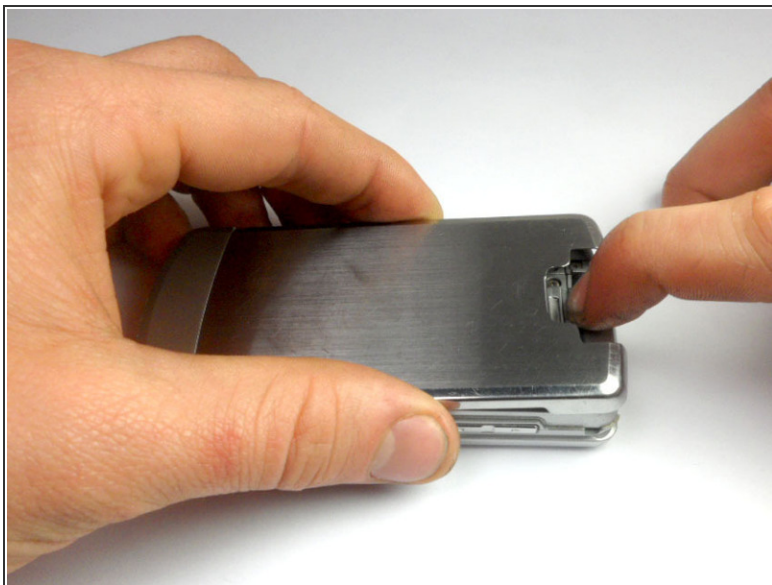

- Turn the cell phone off.
- Remove the back cover of the cellphone by sliding the tab away from the phone using one finger.

## Step 2



- Lift one side of the battery using a plastic opening tool or your fingers.
- Carefully remove the battery and set it aside.



## Step 3



**⚠** When installing the battery, make sure to align the metal pins with those of the phone

## Step 4 — Front Bezel



- Turn your phone around and open the flip phone.
- Locate the two grey rubber plugs on the LCD portion of the phone. These plugs cover up two screws.
- Remove the two grey screw-covers at the bottom of the screen

## Step 5




- Remove the screen by using the tab to eject the screen.
  - There is a gap between the case and the screen near the ear piece
  - Insert the plastic opening tool in the gap and pry the screen up.
- ⓘ The plastic screen cover is glued onto the phone, do not be alarmed if it may be difficult to pry it off.

## Step 6



- Unscrew the four corner 3.21mm screws to separate the the top cover of the phone


## Step 7

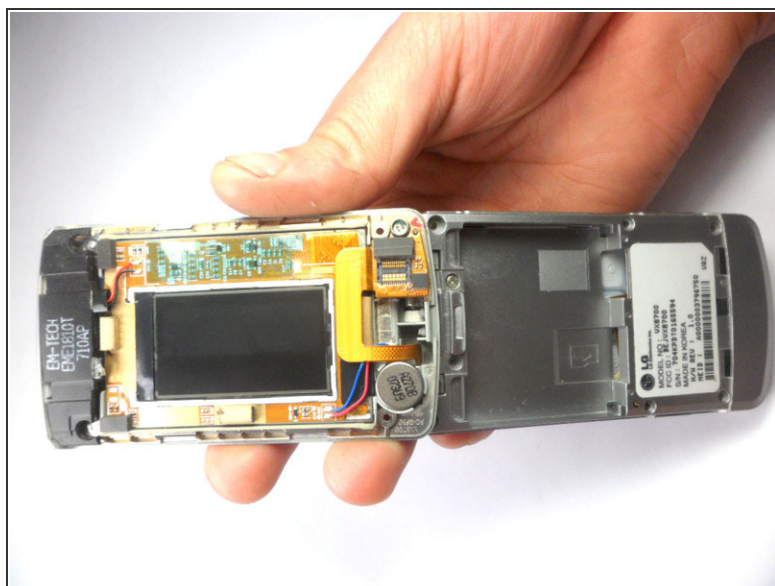

- Turn your phone around
- Remove the top cover of the phone by inserting the plastic opening tool into the groove.
- Carefully open the cover.




## Step 8 — Camera

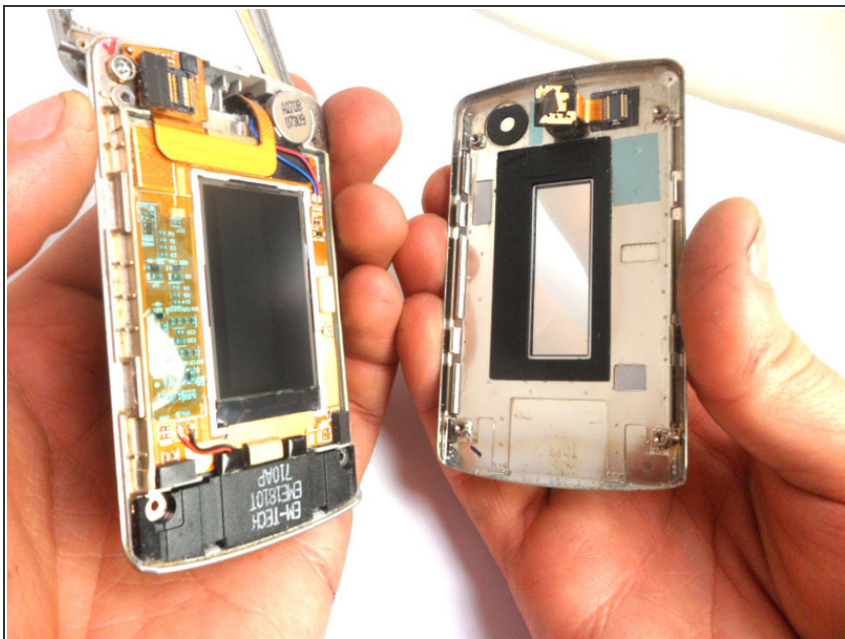


- Now we have the LCD outer case off. The LCD display can be seen on the left, the camera on the right.
- Place the phone assembly down, it is not needed anymore.

## Step 9

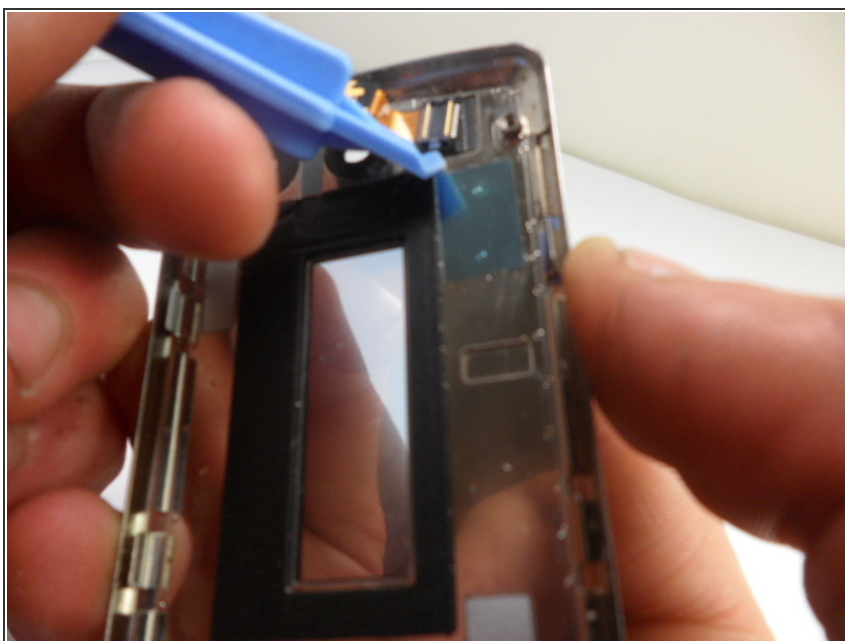

- To remove the camera the ribbon connector should be removed.
- This ribbon connector is glued to the case, using the plastic opening tool pry the connector off.

## Step 10

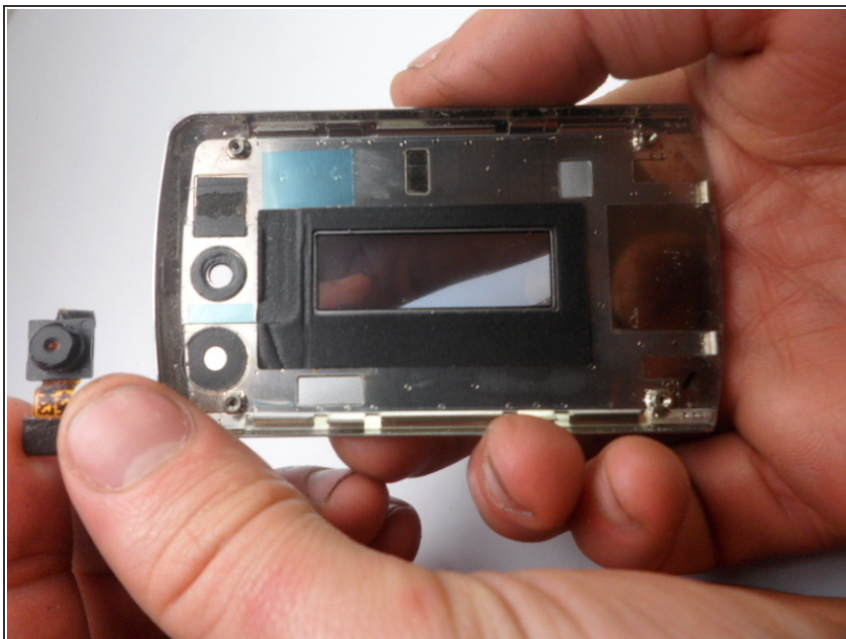

- The camera should come loose after the connector is pried off.
- Take the new camera and apply a small square of double sided tape to the new ribbon connector.

---

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-07 01:07:54 PM.